

VSS Series

Features

- 4 ϕ ~ 6.3 ϕ , 85°C, 2,000 hours assured
- Vertical chip type miniaturized for 4.5mm height capacitor
- Designed for surface mounting on high density PC board
- RoHS compliance




Marking color: Black

Specifications

Items	Performance																										
Category Temperature Range	-40°C ~ +85°C																										
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																										
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																										
Tanδ (at 120 Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.50</td> <td>0.30</td> <td>0.24</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> </tr> </tbody> </table>	Rated Voltage	4	6.3	10	16	25	35	50	Tanδ (max)	0.50	0.30	0.24	0.19	0.16	0.14	0.14										
Rated Voltage	4	6.3	10	16	25	35	50																				
Tanδ (max)	0.50	0.30	0.24	0.19	0.16	0.14	0.14																				
Low Temperature Characteristics (at 120 Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>15</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage		4	6.3	10	16	25	35	50	Impedance Ratio	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	Z(-40°C)/Z(+20°C)	15	8	5	4	3	3	3
Rated Voltage		4	6.3	10	16	25	35	50																			
Impedance Ratio	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2																			
	Z(-40°C)/Z(+20°C)	15	8	5	4	3	3	3																			
Endurance	<table border="1"> <thead> <tr> <th>Test Time</th> <th>2,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value for 4 ~ 6.3V Within ±25% of initial value for 10 ~ 50V</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.</p>	Test Time	2,000 Hrs	Capacitance Change	Within ±30% of initial value for 4 ~ 6.3V Within ±25% of initial value for 10 ~ 50V	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value																		
Test Time	2,000 Hrs																										
Capacitance Change	Within ±30% of initial value for 4 ~ 6.3V Within ±25% of initial value for 10 ~ 50V																										
Tanδ	Less than 300% of specified value																										
Leakage Current	Within specified value																										
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance.																										
Ripple Current and Frequency Multipliers	<table border="1"> <thead> <tr> <th>Frequency(Hz)</th> <th>50</th> <th>120</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.7</td> <td>1.0</td> <td>1.3</td> <td>1.4</td> </tr> </tbody> </table>	Frequency(Hz)	50	120	1k	10k up	Multiplier	0.7	1.0	1.3	1.4																
Frequency(Hz)	50	120	1k	10k up																							
Multiplier	0.7	1.0	1.3	1.4																							

Diagram of Dimensions

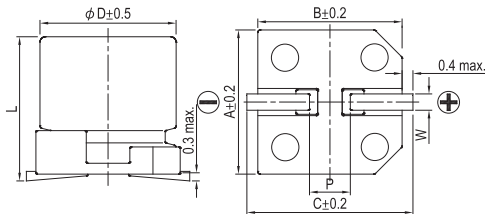


Lead Spacing and Diameter

φD	L	A	B	C	W	P ± 0.2
4	4.5 ± 0.2	4.3	4.3	5.1	0.5 ~ 0.8	1.0
5	4.5 ± 0.2	5.3	5.3	5.9	0.5 ~ 0.8	1.5
6.3	4.5 ± 0.2	6.6	6.6	7.2	0.5 ~ 0.8	2.0

Unit: mm

Marking

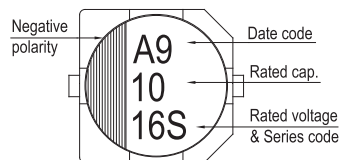

Dimension and Permissible Ripple Current

Dimension: φD × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

Rated Volt. (Voc)	Cap. (μF)	Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
			φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA
0.47	R47															
1	010														4×4.5	4.0
2.2	2R2														4×4.5	8.4
3.3	3R3														4×4.5	13
4.7	4R7														4×4.5	17
10	100								4×4.5	16	4×4.5	18	5×4.5	20		
22	220			4×4.5	23	5×4.5	33	5×4.5	37	6.3×4.5	42	6.3×4.5	46	6.3×4.5	33	
33	330	4×4.5	28	5×4.5	37	5×4.5	41	6.3×4.5	49	6.3×4.5	52					
47	470	4×4.5	33	5×4.5	45	6.3×4.5	70	6.3×4.5	58							
100	101	5×4.5	56	6.3×4.5	70											

Part Numbering System

VSS Series	10μF	±20%	16V	Carrier Tape	4 φ × 4.5L	Pb-free and PET coating case
VSS	100	M	1C	TR	-	0404
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size
						Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.